


ESPECIFICACIONES



- ✓ Cuerpo del luminario: Aluminio fundido con lente templado en policarbonato.
- ✓ Tecnología: Ledvance®
- ✓ Montaje: Brazo 2"
- ✓ Horas de Vida: 50,000 Hrs.
- ✓ IP: 66
- ✓ 5 años de Garantía

POTENCIA	A	B	C	D
60W	325.2mm	120.5mm	63.8mm	84.8mm
90W	355.5mm	130.5mm	63.8mm	84.4mm
70W	406.2mm	150.5mm	63.8mm	85.4mm

Potencia	Lúmenes	Eficiencia	IRC	TDC	Voltaje
60W	3,000	100Lm/W	>80	4000K 6500K	100-240V
50W	5,000	100Lm/W	>80	4000K 6500K	100-240V
70W	7,000	100Lm/W	>80	4000K 6500K	100-240V

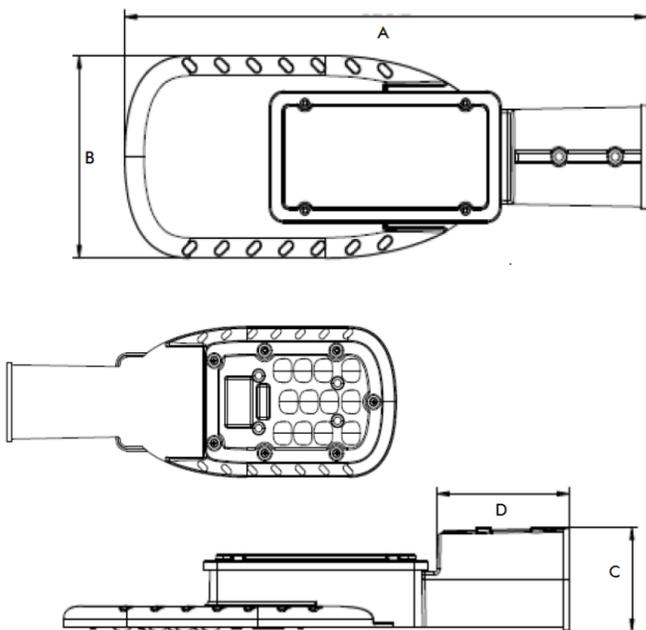

APLICACIONES



CALLES Y AVENIDAS

ESTACIONAMIENTO

CAMINOS RURALES

PERIFÉRICOS VÍAS RÁPIDAS EJES VIALES

CARRETERAS Y LIBRAMIENTOS

COTOS Y ZONAS RESIDENCIALES

CURVA DE ILUMINACIÓN-DISTANCIA

